


R Series

General description

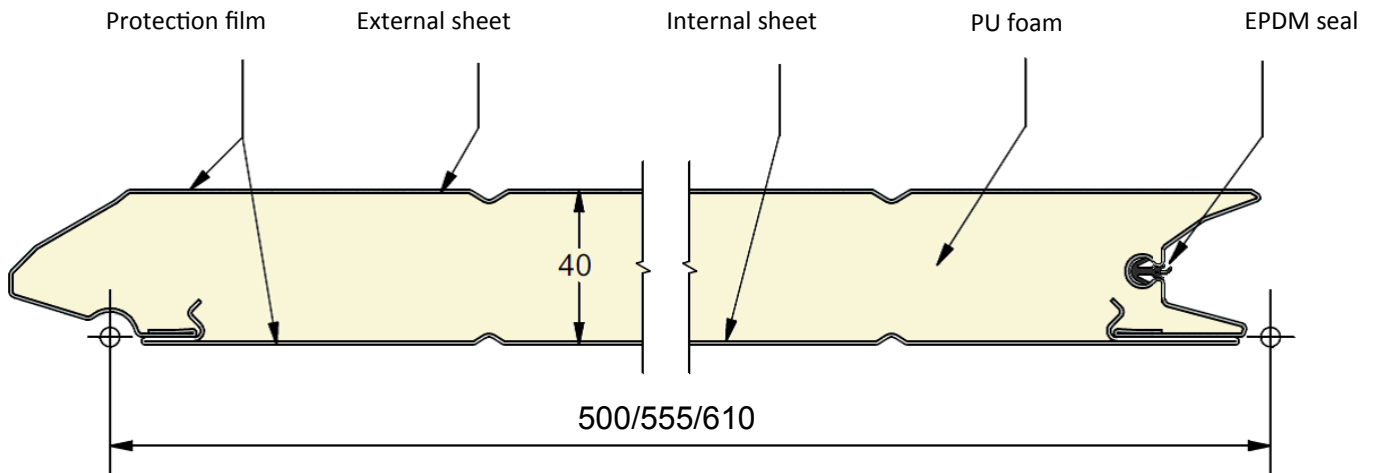

External sheet

- thickness 0,48mm
- galvanized Z225
- prepainted with 25 μ thick polyester or PU paint (plain colours)
- coated with 115 μ thick PVC film (wood imitations)

Internal sheet

- thickness 0,30mm
- galvanized Z100
- prepainted with 25 μ polyester paint

PVC protective film

- thickness 25 μ
- covering heights in mm:

Panel	Outside film	Inside film
500	502	483
555	557	538
610	612	593

PUR Foam

- density : 38 to 40Kg/m³
- without HFC, CFC or HCFC contents

Seal EPDM



Construction of the monoshell panel

- Polyester or PVC coating
- Primer
- Galvanized steel Z225
- Foam
- Galvanized steel Z100
- Primer
- Polyester coating

